
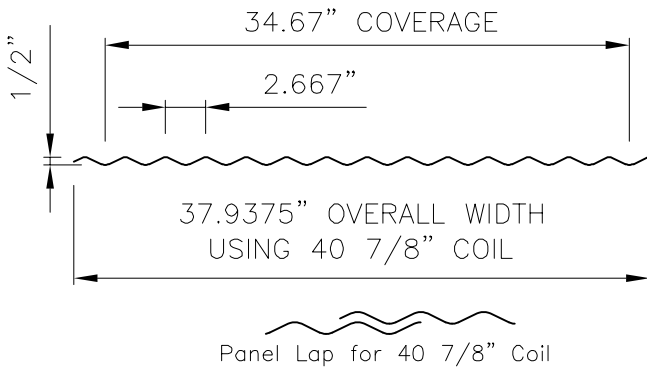


M-COR PANEL

PRODUCT DATA

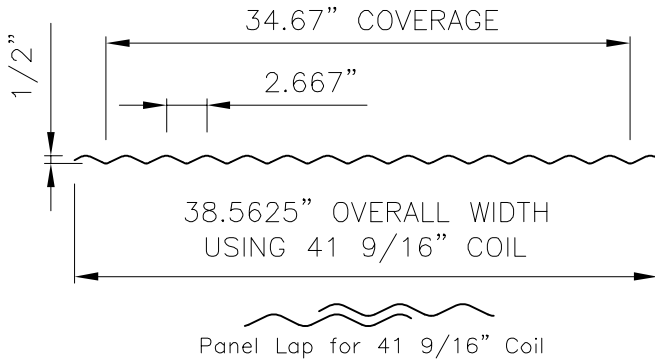

M-COR PROFILE

Applications

Exposed fastener wall/roof panel used on slopes down to 1:12. (Tape sealant is required on seam (side-laps) Standard panel lengths up to 50'. Please inquire for longer lengths.

Substrates

Plywood or Purlins.

Material

- Standard - 29 GA. ASTM A792 (80 ksi steel) AZ55 - Bare
- AZ50 - Painted
- 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
- AZ50 - Painted
- Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
- AZ50 - Painted

Manufacturing

Roll formed in factory. (Bossier plant only)

Finishes

- Acrylic Coated Galvalume®
- Fluoropolymer (Kynar 500® PVDF resin-based)
- Siliconized Polyester and Polyester

Pan Conditions



Oil canning is inherent in all metal panels and is not cause for panel rejection.

Testing *

- Fire Resistance: UL 790 Class A
- Impact Testing: UL 2218 Class 4
- *Testing and Approvals are product specific. Please inquire for details.*

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

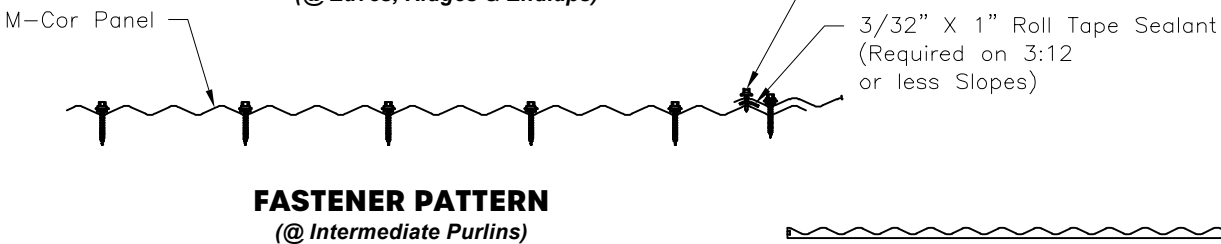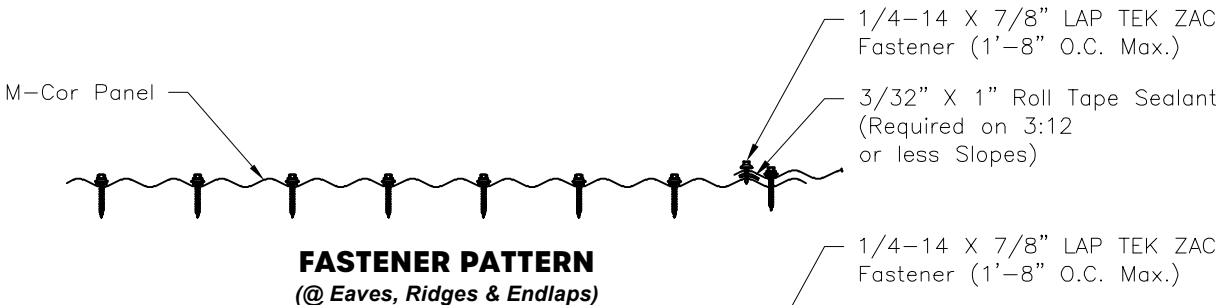

FOAM INSIDE/OUTSIDE CLOSURE