



MULTI-COR PANEL

PRODUCT DATA

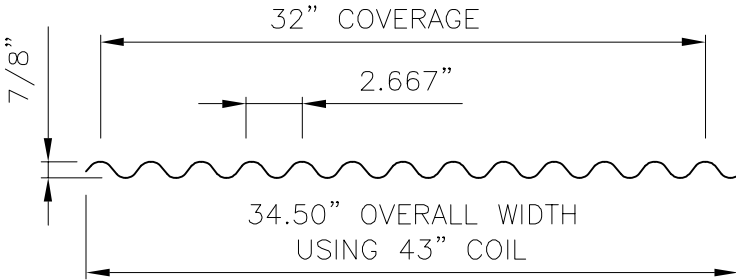

MULTI-COR PROFILE

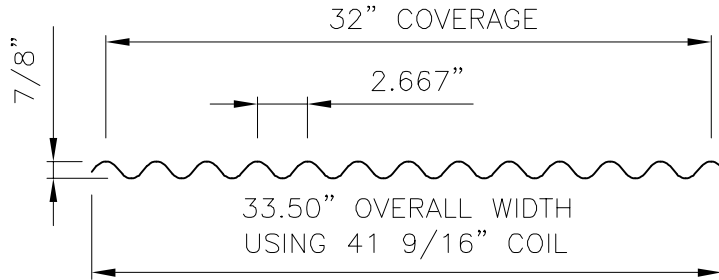

MULTI-COR PROFILE



NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

Applications

Exposed fastener wall/roof panel used on slopes down to 1:12. Tape sealant is required on seam (side-laps). Standard panel lengths up to 50'. Please inquire for longer lengths.

Substrates

Plywood or Purlins.

Material

- Standard - 26 GA. ASTM A792 (50 ksi or 80 ksi steel)
- AZ55 - Bare, AZ50 - Painted
- 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
- AZ50 - Painted
- Optional - 22 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
- AZ50 - Painted

Manufacturing

Roll formed in factory. (Bossier plant only)

Finishes


- Acrylic Coated Galvalume®
- Fluoropolymer (Kynar 500® PVDF resin-based)
- Siliconized Polyester and Polyester

Pan Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

Testing *

- Uplift Testing: UL 580 Class 90
- Fire Resistance: UL 790 Class A
- Impact Testing: UL 2218 Class 4
- Florida Product Approval: FL 10680.1 (non-structural)
- Texas Windstorm: RC-158
- *Testing and Approvals are product specific. Please inquire for details.*

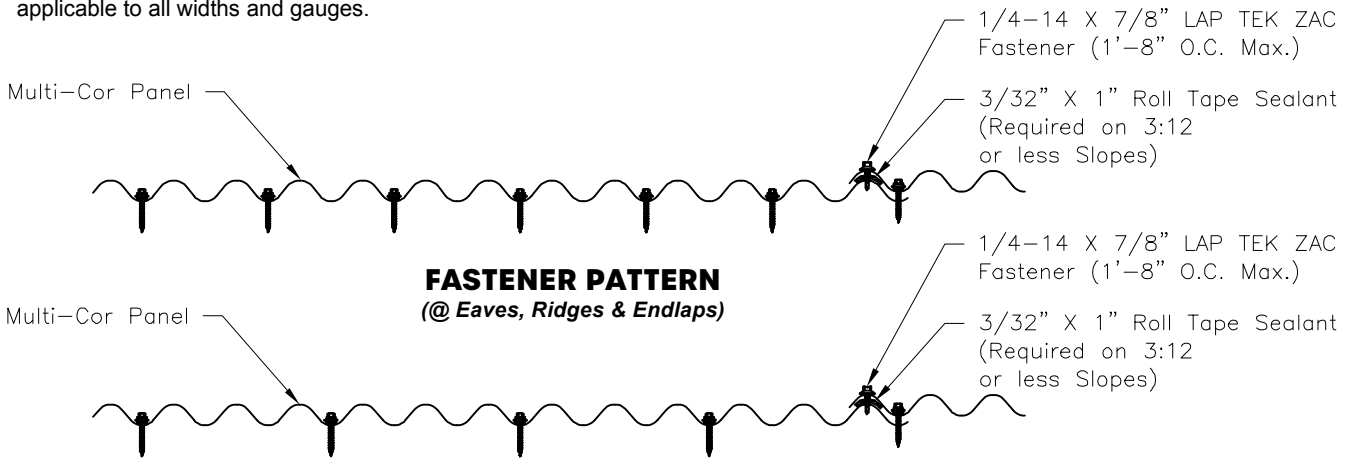

FASTENER PATTERN
(@ Eaves, Ridges & Endlaps)

FASTENER PATTERN
(@ Intermediate Purlins)



FOAM INSIDE/OUTSIDE CLOSURE